

The Izze-Racing infrared sensor is specifically designed to measure the highly transient surface temperature of a tire with spatial fidelity, providing invaluable information for chassis tuning, tire exploitation, and driver development.

Each sensor is capable of measuring temperature at 16, 8, or 4 laterally-spaced points, at a sampling frequency of up to 100Hz, object temperature between -20 to 300°C, using CAN 2.0A protocol, enclosed in a compact IP66 rated aluminum enclosure, and priced to be affordable to all tiers of motorsport.



The sensor is now offered as a complete kit for any data acquisition system that can log CAN messages. The kit includes four 4, 8, or 16-channel infrared tire temperature sensors with wide (60°) or ultra-wide (120°) field-of-views and a complete motorsport-grade wiring harness.

## SENSOR SPECIFICATIONS

Temperature Measurement Range, $T_o$	-20 to 300 °C	
Package Temperature Range, $T_p$	-20 to 85 °C	
Accuracy (Central 10 Channels, Nominal) (16-Ch Sensor)	$\pm 1.0$ °C	$T_{\text{sensor}} < 50$ °C
	$\pm 2.0$ °C	$T_{\text{sensor}} > 50$ °C
Accuracy (First & Last 3 Channels, Nominal) (16-Ch Sensor)	$\pm 2.0$ °C	$T_{\text{sensor}} < 50$ °C
	$\pm 3.0$ °C	$T_{\text{sensor}} > 50$ °C
Noise Equivalent Temperature Difference, NETD	0.5 °C	16Hz, $\epsilon = 0.85$ , $T_o = 25$ °C
Field of View, FOV	60° x 8° (IRTS-60-V2)	
	120° x 14° (IRTS-120-V2)	
Number of Channels	16, 8, or 4	
Sampling Frequency	100, 64, 32, 16, 8, 4, 2, or 1Hz	
Thermal Time Constant	2 ms	
Effective Emissivity	0.01 to 1.00 (default = 0.85)	
Spectral Range	8 to 14 $\mu\text{m}$	

## ELECTRICAL SPECIFICATIONS (SENSOR)

Supply Voltage, $V_s$	5 to 10 V
Supply Current, $I_s$ (typ)	30 mA
Features	<ul style="list-style-type: none"> <li>Reverse polarity protection</li> <li>Over-temperature protection (125 °C)</li> </ul>

## MECHANICAL SPECIFICATIONS

Weight	< 18.0 g
L x W x H (max, 60° FOV)	37.6 x 26.0 x 12.3 mm
L x W x H (max, 120° FOV)	32 x 29.0 x 12.3 mm
Protection Rating	IP66



## CAN SPECIFICATIONS

Standard	CAN 2.0A (11-bit identifier), ISO-11898
Bit Rate	1 Mbit/s
Byte Order	Big-Endian / Motorola
Data Conversion	0.1 °C per bit, -100 °C offset, unsigned
Base CAN ID's (Default)	LF Sensor: 1200 (Dec) / 0x4B0 (Hex) RF Sensor: 1204 (Dec) / 0x4B4 (Hex) LR Sensor: 1208 (Dec) / 0x4B8 (Hex) RR Sensor: 1212 (Dec) / 0x4BC (Hex)
Termination	None

### CAN ID: Base ID

Channel 1		Channel 2		Channel 3		Channel 4	
Byte 0 (MSB)	Byte 1 (LSB)	Byte 2 (MSB)	Byte 3 (LSB)	Byte 4 (MSB)	Byte 5 (LSB)	Byte 6 (MSB)	Byte 7 (LSB)

### CAN ID: Base ID+1

Channel 5		Channel 6		Channel 7		Channel 8	
Byte 0 (MSB)	Byte 1 (LSB)	Byte 2 (MSB)	Byte 3 (LSB)	Byte 4 (MSB)	Byte 5 (LSB)	Byte 6 (MSB)	Byte 7 (LSB)

### CAN ID: Base ID+2

Channel 9		Channel 10		Channel 11		Channel 12	
Byte 0 (MSB)	Byte 1 (LSB)	Byte 2 (MSB)	Byte 3 (LSB)	Byte 4 (MSB)	Byte 5 (LSB)	Byte 6 (MSB)	Byte 7 (LSB)

### CAN ID: Base ID+3

Channel 13		Channel 14		Channel 15		Channel 16	
Byte 0 (MSB)	Byte 1 (LSB)	Byte 2 (MSB)	Byte 3 (LSB)	Byte 4 (MSB)	Byte 5 (LSB)	Byte 6 (MSB)	Byte 7 (LSB)

## WIRING SPECIFICATIONS (SENSOR)

Wire	26 AWG M22759/32, DR25 jacket
Cable Length (typ.)	500 mm
Connector	Deutsch DTM 4P (gold contacts)

Supply Voltage, V <sub>s</sub>	Red
Ground	Black
CAN +	Blue
CAN -	White

## SENSOR CONFIGURATION:

To modify the sensor's configuration, send the following CAN message at 1Hz for at least 10 seconds and then reset the sensor by cycling power:


### CAN ID: Current Base ID

Programming Constant		New CAN Base ID (11-bit)		Emissivity	Sampling Frequency		Channels	Bite Rate
Byte 0 (MSB)	Byte 1 (LSB)	Byte 2 (MSB)	Byte 3 (LSB)	Byte 4	Byte 5		Byte 6	Byte 7
30000 = 0x7530		1 = 0x001		1 = 0.01	1 = 1Hz	5 = 16Hz	40 = 4 Ch	1 = 1 Mbit/s
		⋮		⋮	2 = 2Hz	6 = 32Hz	80 = 8 Ch	2 = 500 kbit/s
		2047 = 0x7FF		100 = 1.00	3 = 4Hz	7 = 64Hz	160 = 16 Ch	3 = 250 kbit/s
					4 = 8Hz	8 = 100Hz		4 = 100 kbit/s


CAN messages should only be sent to the sensor during the configuration sequence.  
*DO NOT continuously send CAN messages with the same Base CAN ID to the sensor.*

## DIMENSIONS:


### 60° Field-of-View, IRTS-60-V3

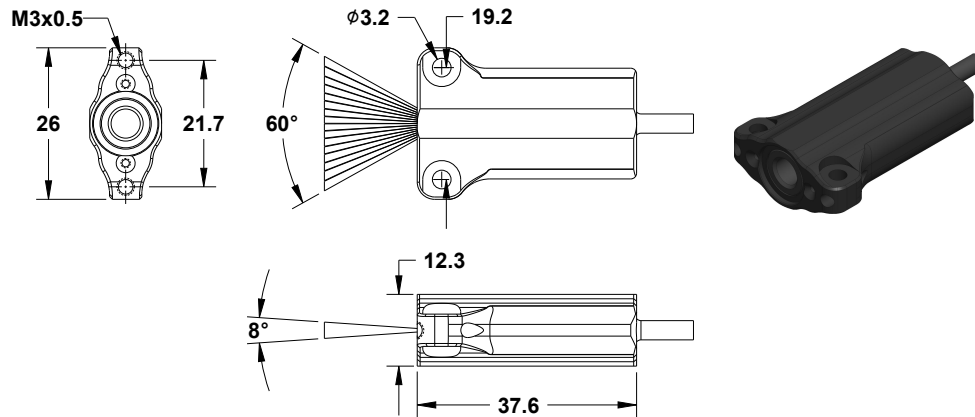

### 120° Field-of-View, IRTS-120-V3

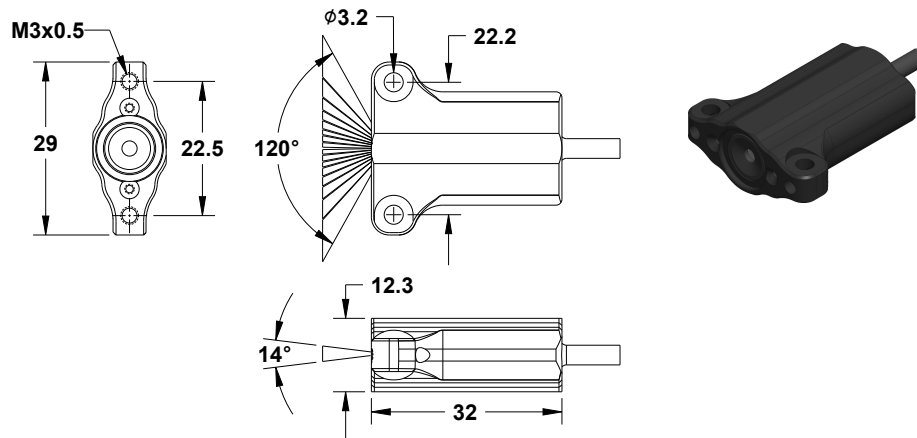


## 60° Field-of-View, IRTS-60-V3:

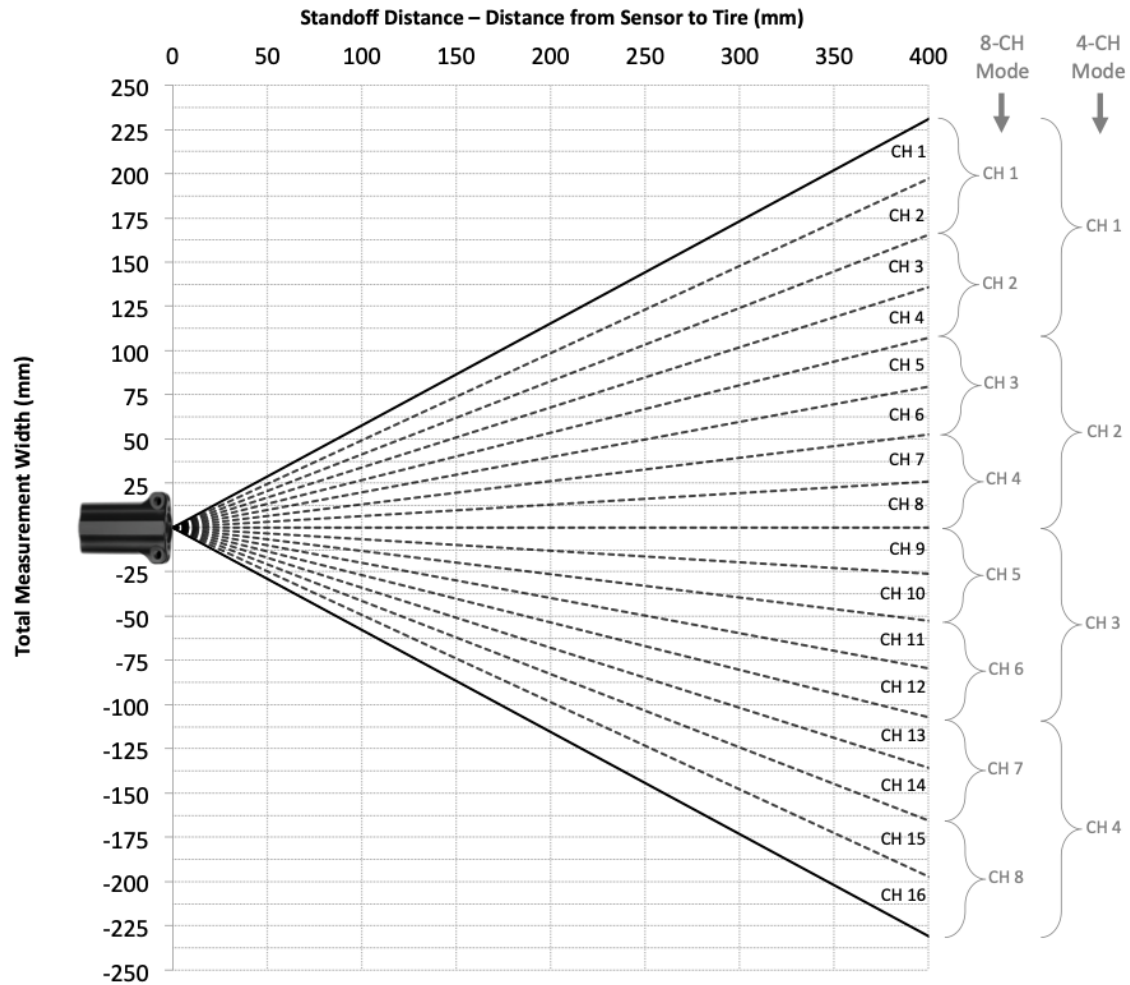

(Angle offset, z-axis rotation, between -5° and +5°, mounts should allow adjustment accordingly)

## 120° Field-of-View, IRTS-120-V3:

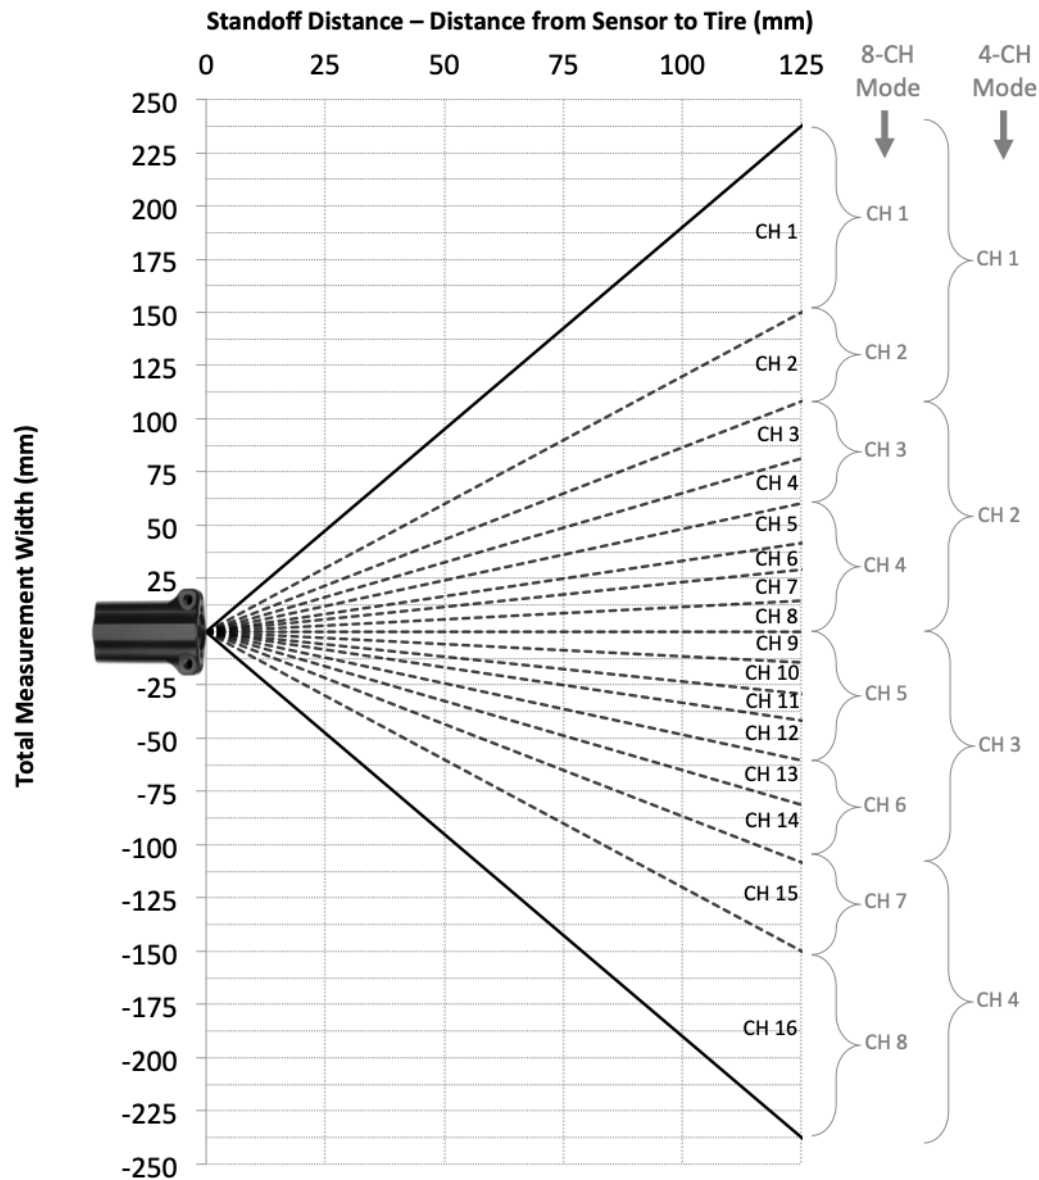

(Angle offset, z-axis rotation, between -5° and +5°, mounts should allow adjustment accordingly)



### WIRING SPECIFICATIONS (HARNESS):


Wire	24 AWG M22759/32, DR25 jacket, ATUM boots
Cable Length (typ.)	1.8-2.1m trunk segments, 0.5m branches
Connectors	Deutsch DTM 4P (gold contacts)

CAN -	Green	(Pin 1)	
CAN +	White	(Pin 2)	(twisted)
Supply Voltage, $V_s$	Red	(Pin 3)	
Ground	Black	(Pin 4)	(twisted)

- The default wiring harness layout is shown in the diagram below and is designed for data loggers without an internal CAN terminating resistor.
- The harness should be powered with 5-10 volts (120mA); battery voltage can be used, but is not preferable.
- The CAN terminating resistors are integrated into the RF and RR Deutsch DTM connectors. Resistor value is 120 $\Omega$ .
- Harness lengths and layout can be modified upon request; please contact us at: [sales@izzeracing.com](mailto:sales@izzeracing.com)


## DEFAULT WIRING HARNESS LAYOUT:

(Data logger without internal CAN terminating resistor)

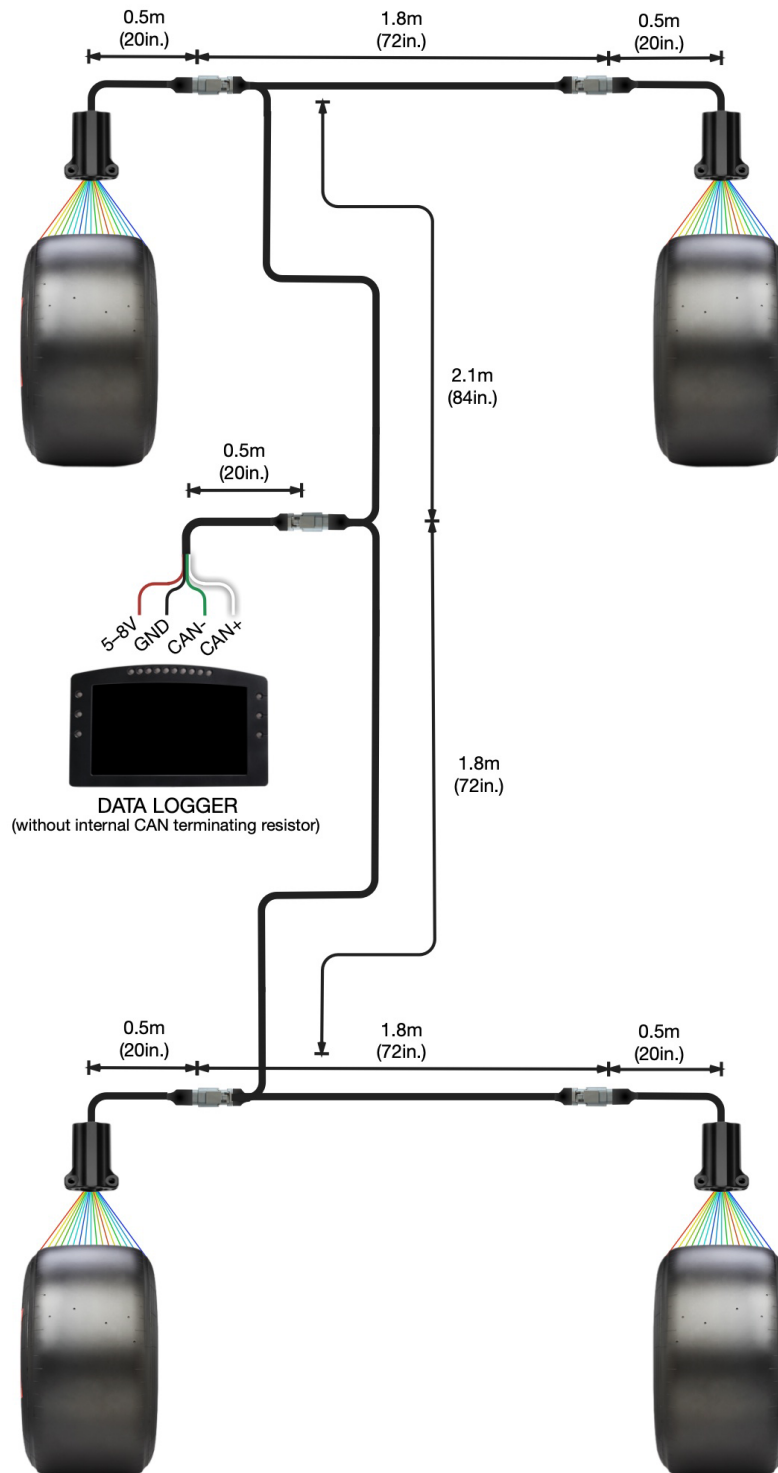


**FRONT FACE MOUNTING, IRTS-120-V3:**

- With the IRTS-120-V3, care has to be taken when mounting from the front face holes given the wide width (120°) of the infrared temperature channels. If the mounting bolt standoff from the front face is greater than 3mm, then it will partially block temperature channels 1 and 16.
- It's recommended to use M3 x 0.5 flat head bolts with a 90° countersunk hole to keep bolt-to-face standoff distances < 3mm.
- If this cannot be prevented, ignore temperature readings from CH1 and CH16.

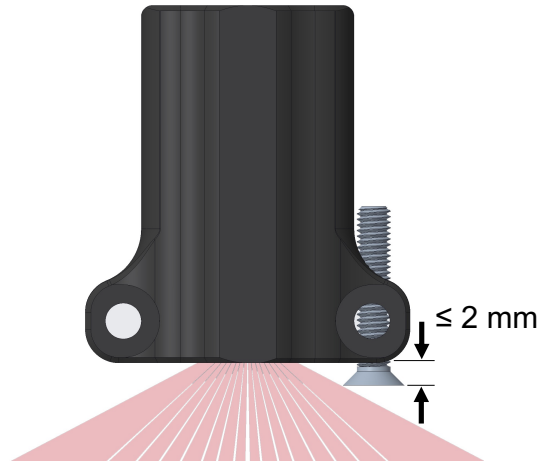
**GERMANIUM PROTECTIVE WINDOW, IRTS-GE-V1:**


- A Germanium protective window is available for applications subjected to impinging debris (e.g., sensor placed behind tire).
- The window is specifically designed for the IRTS sensor to achieve superior accuracy with minimal IR signal attenuation.

 The effective emissivity is lowered by 10% with the window installed

- Default emissivity, window installed = 0.75 (IRTS-120-V3), 0.68 (IRTS-60-V3)

- The window mounts with two #00 Philips screws.

 Screws require blue thread locker


 Lightly torque screws, excessive torque could crack window





## ADDITIONAL INFORMATION:

- Stated accuracy is under isothermal package conditions; for utmost accuracy, avoid abrupt temperature transients and gradients across the sensor's package.
- Point the sensor in the downstream direction (facing front of tire) to avoid contamination, pitting, and/or destruction of the sensor's lens from debris. Germanium protective windows are available as an optional extra for protection and upstream facing applications.
- The *effective* emissivity of most tires ranges from approximately 0.75 to 0.90 in the 8 to 14  $\mu\text{m}$  spectrum.
  - Generally, the emissivity should be lowered as the standoff distance (distance from tire to sensor) increases; this is particularly important with the 60° FOV sensor due to the larger standoff distances required. The suggested emissivity vs. standoff distance is shown in the graph below:

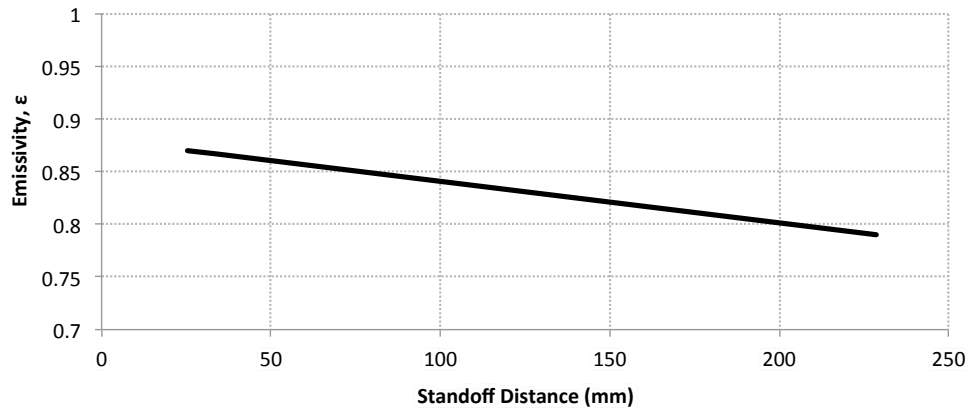

- Lowering the emissivity increases the measured object temperature and vice versa
- Noise Equivalent Temperature Difference (NETD) increases with increasing sampling frequency:
  - Provided that tire surface temperature is highly transient, it is usually advantageous to use a higher sampling frequency at the cost of increased noise. A sampling frequency of 16 or 32 Hz is recommended for most applications.

